

TRANSMISIONES CASE

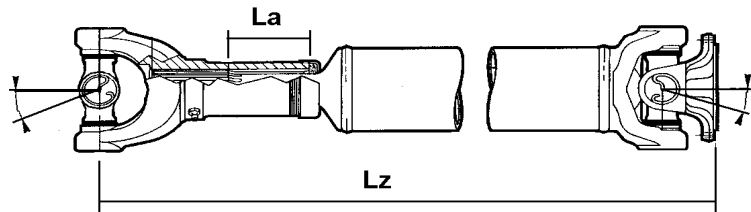


FIG. 1

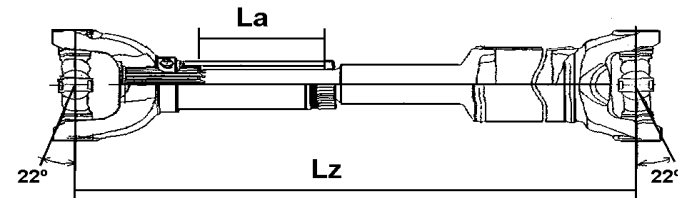


FIG. 2

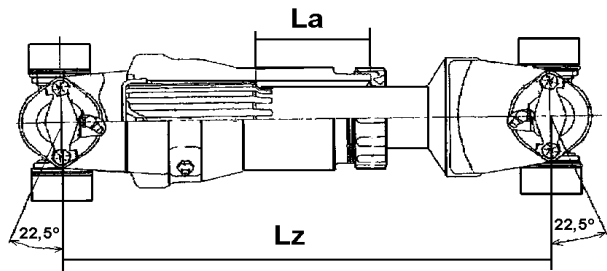


FIG. 3

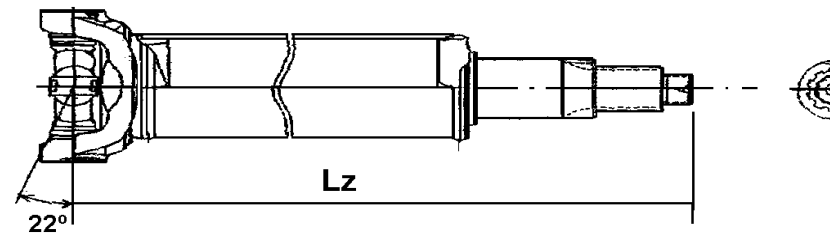


FIG. 4

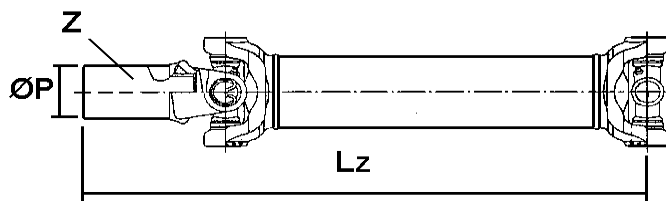


FIG. 5

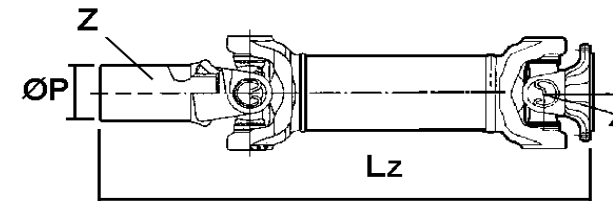


FIG. 6

TRANSMISIONES CASE



REF. Cardyfren	PARA CRUZ		SERIE	FIG.	Lz	La	FIJACION HORQ. CORRED.	FIJACION HORQ. FIJA	β	TUBO	OBSERV.		
	Ø B	D											
1350 350001 1128C	30,1	92	1350	1	1451	79,2	Cruz con abrazadera (Strap)	Plato SAE Ø119x4x11		76,2x2,1	(D-143185)	915292-3208	
1550 360000 0753C	34,9	126,1	1550	2	753,8	127	Cruz con abrazadera (Strap)	Cruz con abrazadera (Strap)	34°	88,9x2,4	(L-127279)	916350-1023	
1610 360000 0897C	47,6	134,9	1610	2	897	124	Cruz con abrazadera (Strap)	Cruz con abrazadera (Strap)	34°	88,9x3,4	(L-125185) Cruces mixtas	805670-2006	
1550 940000 205C	34,9	126,1	1550	3	205	38,1	Cruz con abrazadera (Strap)	Cruz con abrazadera (Strap)	22,5°	-	(L-127277)	916300-2	
1550 940000 167C	34,9	126,1	1550	3	166,9	38,1	Cruz con abrazadera (Strap)	Cruz con abrazadera (Strap)	22,5°	-	(L-127278)	916300-1	
1610 940000 200C	47,6	134,9	1610	3	200	39,6	Cruz con abrazadera (Strap)	Cruz con abrazadera (Strap)	22,5°	-	(L-125803) Cruces mixtas	815509-1	
1550 370000 670C	34,9	126,1	1550	4	670,3	-	Barron para rodamiento	Cruz con abrazadera (Strap)	22°	88,9x2,4	(L-127280)	915040-1716	
1550 370000 630C	34,9	126,1	1550	4	630,3	-	Barron para rodamiento	Cruz con abrazadera (Strap)	22°	88,9x2,4	(L-127281)	915040-1530	
1610 370000 671C	47,6	134,9	1610	4	671	-	Barron para rodamiento	Cruz con abrazadera (Strap)	22°	88,9x3,4	(L-125183)	815356-1610	
1310 340201 615C	27	81,7	1310	5	615		Horquilla invertida Ø P= 51/Z=21estrias.	Cruz con abrazadera (Strap)		50,8x2,4	(D-129436)	7031-0013/0417X	
1310 310401 267C	30,1	92	1310	6	267,3		Horquilla invertida Z=16 estr. / Ø int. 34,9	Plato SAE Ø119x4x11		76,2x2,1			